





COOK LEGACY WATER & ENERGY

A Unit Of Norris Screen

Jacquelyn™ Coating (U.S. Patent #5,945,171) is a permanent metal coating to prevent biofouling. Jacquelyn™ is non-ablative and does not rely on copper leach. Because of this, Jacquelyn™ is a permanent solution. In biofouling-infested waters, the Jacquelyn™-coated object remains free of zebra mussel attachment.

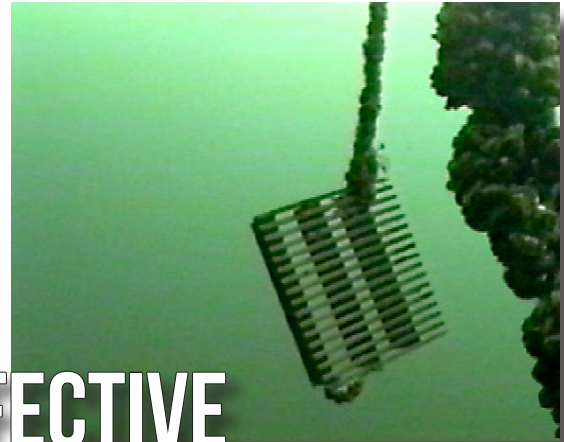

EFFECTIVE

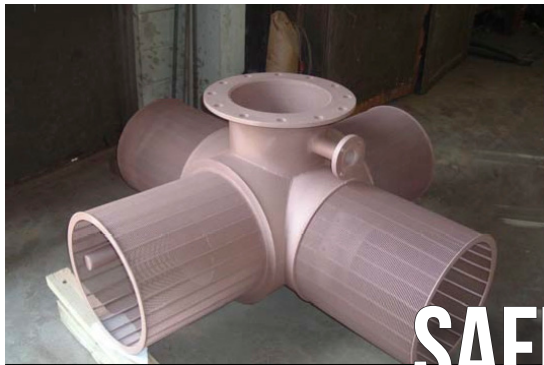

SAFE

Jacquelyn™ is safe for the environment. It has been tested for copper leach in freshwater and seawater. Additionally, an independent environmental laboratory tested Jacquelyn™ per NSF Protocol 61 and determined that copper leach was found to be very low (0.003 ppb) or non-detectable. For details on testing, contact Cook Legacy.

Jacquelyn™ is applied in a tough, thin layer.

- Can be applied effectively with a total thickness of only 0.004 inch, allowing for its use on small slot intake screens without significantly diminishing the flow profile.
- High adhesion values, making it optimal for application on a variety of materials.

Jacquelyn™ is an effective, safe, solution for biofouling prevention at your site.



SOLUTION

Water Solutions Through Innovation
waterscreen.com
Ph: 276.988.8901
Fax: 276.988.8909
email: sales@waterscreen.com

Jacquelyn™ Coating




COOK LEGACY

WATER & ENERGY

A Unit Of Norris Screen

Cook Legacy will work with you to apply these solutions to your project.

Jacquelyn™ Coating Case Studies

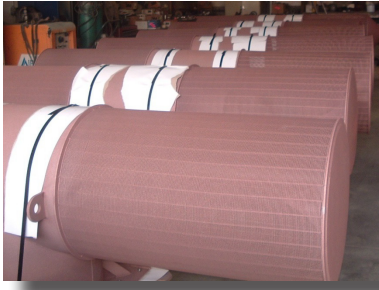

Coating for tee intake for offshore strainer

Biofouling was an issue at an island resort. Cook Legacy worked with the resort owner to retrofit his existing intake system (an offshore strainer) with a new passive screen system.

Cook Legacy worked with the site owner to develop a custom flow modifier within the system to ensure consistent flow, and to make the screens so they could be easily installed and removed. To address biofouling concerns Cook Legacy coated the screens with Jacquelyn™ Coating.

Coating for intake pipe at power plant

A power plant was retrofitting its cooling water intake system to comply with EPA Regulation 316(b). Concerns arose because the water body was infested with zebra mussels. In addition, the flow rate through the system was going to be decreased to a flow rate optimal for zebra mussel growth. The facility needed to maintain ample cooling water to avoid costly thermal discharge penalties or a system outage. Jacquelyn™ Coating to address these concerns. Our ASME Certified fabricators built the pipe and applied Jacquelyn™ Coating to the ID of the pipe array. This application led to a significant reduction in capital cost over the use of exotic material such as 90-10 CuNi for the piping.



Coating for flat panel screens at hydro plant

A small hydroelectric plant in Montana was inundated with biofouling problems. To protect their system, they retrofitted their existing structure with an array of flat panels coated with Jacquelyn™ Coating. Cook Legacy provided a solution that simply worked.

Jacquelyn™ Coating